

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
20 October 2005 (20.10.2005)

PCT

(10) International Publication Number  
**WO 2005/097589 A1**

(51) International Patent Classification<sup>7</sup>: B63B 3/06, 9/06

(21) International Application Number:  
PCT/NZ2005/000063

(22) International Filing Date: 31 March 2005 (31.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
532110 5 April 2004 (05.04.2004) NZ

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and


(72) Inventor: BREE, Charles, Caulder [NZ/NZ]; 1 Koheroa Road, Mercer (NZ).

Published:  
— with international search report

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MODULAR CONSTRUCTION SYSTEM FOR FLOATING STRUCTURES SUCH AS BOATS

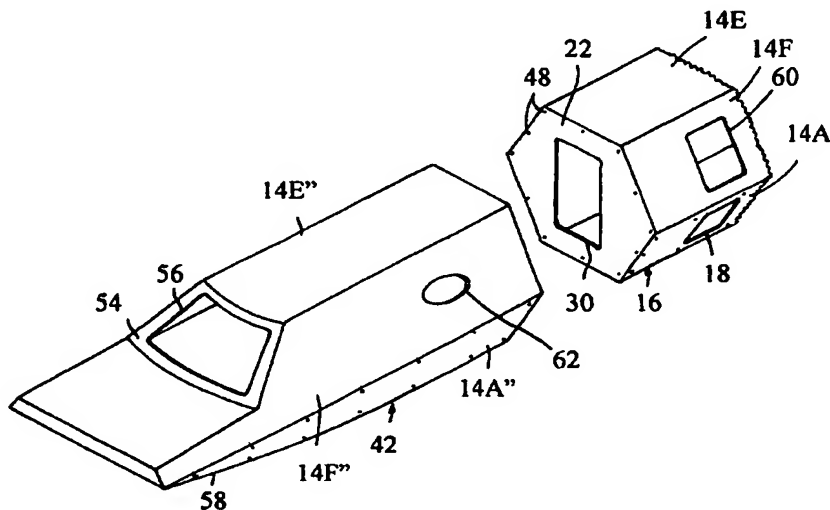

(57) Abstract: An assembly of mouldings (16, 42) that can be joined together and used as boats or other floating structures. The mouldings are rotationally moulded plastics material and can be of identical shape. Each of the mouldings has an outer face (14A, 14E, 14F, 22) incorporating at least two zones that are advantageously flat and disposed at an angle one to the other so that one moulding can be joined face-to-face in different configurations. The mouldings preferably each have a hexagonal profile that is similar to each other. The mouldings can be joined together end-to-end or side-to-side. Apertures (18, 30, 56, 60, 62) can be cut in respective faces of the mouldings to provide windows or access to the interior of the moulding.